



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of 9
March 2011

MEMBER OF EOTA



European Technical Assessment ETA-22/0353 of 2022/05/16

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the construction product:

TCM MS PRO

Product family to which the above construction product belongs:

Bonded anchor with anchor rod made of galvanized steel or stainless steel of sizes M8, M10 and M12, for use in masonry

Manufacturer:

Trutek Fasteners Polska Sp. z o.o.
Al. Krakowska 38, Janki
PL-05-090 Raszyn
e-mail: info@trutek.com.pl
www.trutek.com.pl
www.trutekfasteners.eu

Manufacturing plant:

Trutek Fasteners
Plant No 1

This European Technical Assessment contains:

25 pages including 20 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

EAD 330076-00-0604 Metal injection anchors for use in masonry

This version replaces:

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (except the confidential Annexes referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

The Injection system TCM MS PRO is a bonded anchor (injection type) consisting of a mortar cartridge with TCM MS PRO injection mortar, a perforated nylon sleeve, and an anchor rod with hexagon nut and washer in the range of M8, M10 and M12.

The steel elements are made of zinc coated steel or stainless steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry.

An illustration of the product and intended use is given in Annex A1 and Annex A3.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation¹ of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex A4, Table A1. For the installed anchor see Figure given in Annex A3. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable EAD

The anchors are intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 of Regulation (EU) 305/2011 shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences.

The anchor is to be used only for anchorages subject to static or quasi-static loading in solid masonry (Masonry Group b) or hollow or perforated masonry (Masonry

Group c) according to Annex B9. The mortar strength class of the masonry has to be M 2,5 according to EN 998-2:2010 at minimum.

The anchors may be installed in Condition w/d: installation in wet substrate and use in structures subjected to dry, internal conditions.

The anchors may be used in the following temperature range:

Ta: -40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C),

Tb: -40°C to +80°C (max short term temperature + 80 °C and max long term temperature + 50 °C).

Elements made of galvanized steel or stainless steel may be used in structures subject to dry internal conditions only.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

¹ The technical documentation of this European Technical Assessment is deposited at ETA-Danmark and, as far as relevant for the tasks of the Notified bodies involved in the attestation of conformity procedure, is handed over to the notified bodies.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Mechanical resistance and stability (BWR 1):

The essential characteristics are detailed in the Annex from C1 to C5.

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex from C4.

Safety in use (BWR4):

For basic requirement Safety in use the same criteria are valid for Basic Requirement Mechanical resistance and stability (BWR1).

Other Basic Works Requirements are not relevant

3.2 Methods of assessment

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Requirements 1 and 4 has been made in accordance with the EAD 330076-00-0604 Metal injection anchors for use in masonry, based on the Use Categories b and c in respect of the base material and Category w/d in respect of installation and use.

4 Attestation and verification of constancy of performance (AVCP)

4.1 AVCP system

According to the decision 1997/177/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 1.

5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking

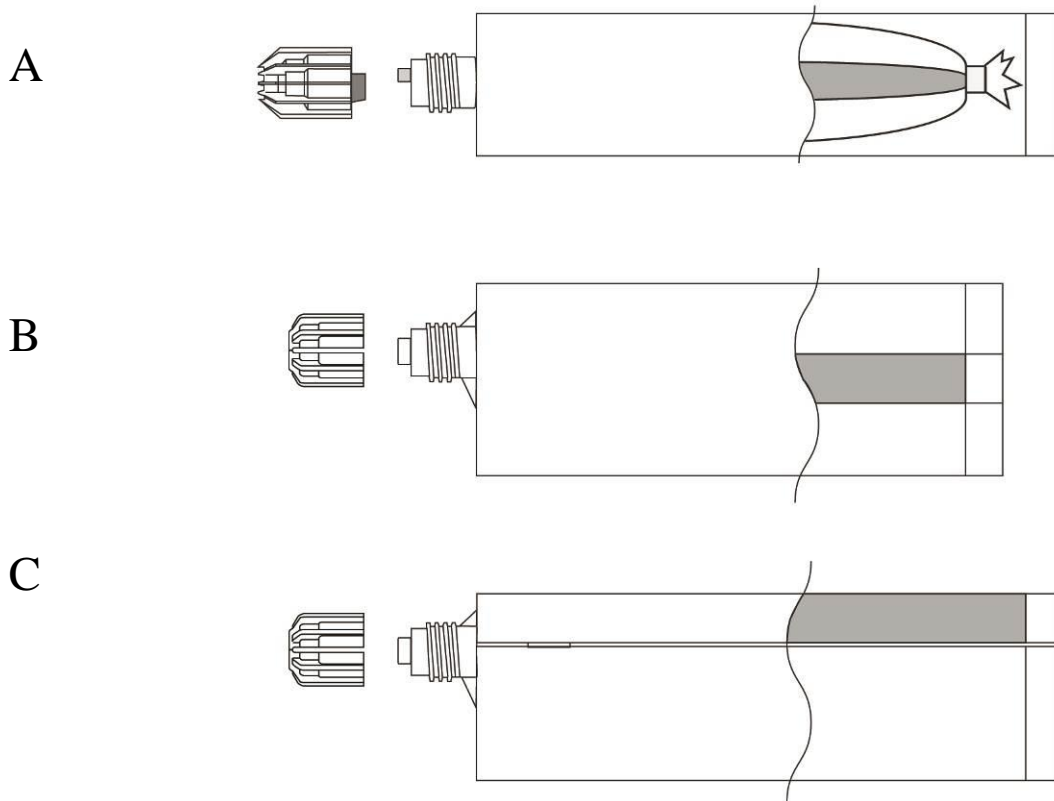
Issued in Copenhagen on 2022-05-16 by



Thomas Bruun
Manager, ETA-Danmark

Injection Mortar : TCM MS PRO

- A) Foil Bag Cartridge 165ml, 300ml
- B) Coaxial Cartridge 380ml, 400ml, 410ml
- C) Side by Side Cartridge 345ml, 825ml



Use category in respect of the base material:

Masonry Group b: metal injection anchors for use in solid masonry.

Masonry Group c: metal injection anchors for use in hollow or perforated masonry.

Use category in respect of installation and use:

Condition w/d: installation in wet substrate and use in structures subjected to dry, internal conditions.


Temperature range:

Ta: -40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C)

Tb: -40°C to +80°C (max short term temperature + 80 °C and max long term temperature + 50 °C)


TCM MS PRO	Annex A1 of European Technical Assessment ETA-22/0353
Product and intended use (1)	

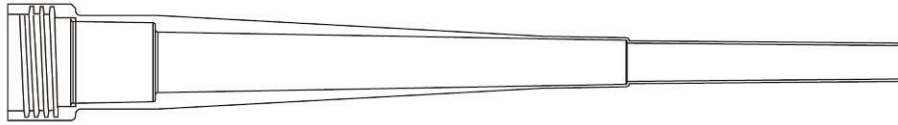Mixer (Standard / + Hanger)




Threaded Steel Stud / Washer + Nut

Sizes M8, M10, M12



Perforated Nylon Sleeve

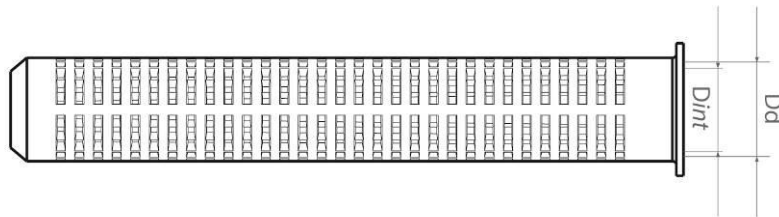Size 16/85




TCM MS PRO


Product and intended use (2)

Annex A2
of European
Technical Assessment
ETA-22/0353

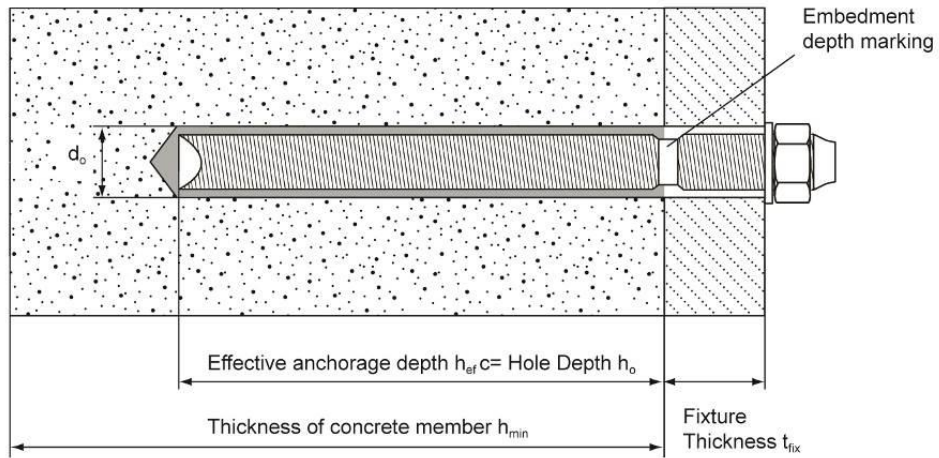Anchor application in solid masonry (brick n°1 according to Annex B9)



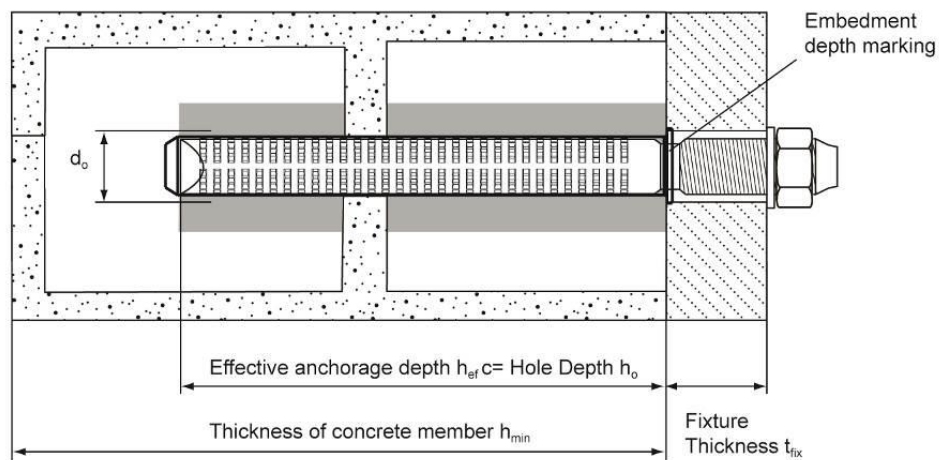Anchor application in hollow/perforated masonry with nylon sleeve (brick n°2 according to Annex B9)



TCM MS PRO

Product and intended use (3)

Annex A3
of European
Technical Assessment
ETA-22/0353

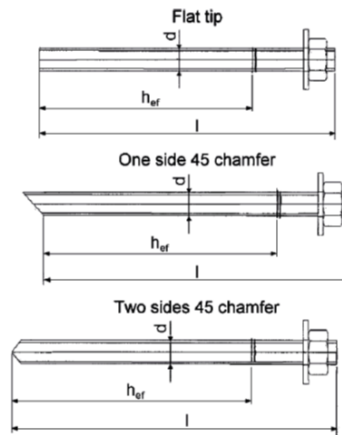


Table A1: Threaded rod dimensions

Anchor size			M8	M10	M12
Diameter of anchor rod	d	[mm] =	8	10	12
Size of sleeve	d _{nom} x l _s	[mm] =	16 x 85		
Nominal anchorage depth	h _{ef}	[mm] =	85		
Maximum diameter hole in fixture	d _{fix}	[mm] ≤	9	12	14
Installation torque moment	T _{inst}	[Nm] =	2	2	2
Depth of drilled hole to deepest point	h ₁	[mm] =	90		

- 1) Marking according EAD 330076-00-0604 Metal injection anchors for use in masonry.
- 2) Effective anchorage depths according to the range specified in table 1.

Table A2: Threaded rods materials

Designation	Material
Threaded rods made of zinc coated steel	
Threaded rod M8 – M12	Strength class 4.6, 5.8, 6.8 EN ISO 898-1 Steel galvanized ≥ 5µm EN ISO 4042 Hot dipped galvanized ≥ 45µm EN ISO 10684
Washer ISO 7089	Steel galvanized EN ISO 4042; hot dipped galvanized EN ISO 10684
Nut EN ISO 4032	Strength class 8 EN ISO 898-2 Steel galvanized ≥ 5µm EN ISO 4042 Hot dipped galvanized ≥ 45µm EN ISO 10684
Threaded rods made of stainless steel	
Threaded rod M8 – M12	Strength class A4-70 and A4-80 EN ISO 3506-1;
Washer ISO 7089	Strength class A4-70 and A4-80 EN ISO 3506-1;
Nut EN ISO 4032	Strength class A4-70 and A4-80 EN ISO 3506-1;

Commercial standard threaded rods with:

- material and mechanical properties according to Table 2;
- confirmation of material and mechanical properties by inspection certificate 3.1 according to EN-10204:2004;
- marking of the threaded rod with the embedment depth.

TCM MS PRO	Annex A4 of European Technical Assessment ETA-22/0353
Threaded rod types, dimensions and materials	

Table A3: Injection mortar

Product	Composition
TCM MS PRO Two components injection mortar	Additive: quartz Bonding agent: TCM MS PRO Hardener: dibenzoyl peroxide

Table A4: Minimum curing time

Temperature in the concrete member	Minimum gelling time in dry conditions (mins)	Minimum load time in dry conditions (mins)
≥ - 5°C	40	180
≥ +5°C	20	90
≥ +15°C	9	60
≥ +25°C	5	30
≥ +35°C	3	20

For wet conditions, the loading time must be doubled

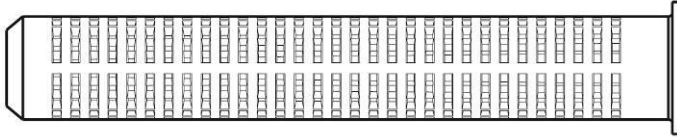
TCM MS PRO

Materials and curing time

Annex A5
of European
Technical Assessment
ETA-22/0353

Plastic sleeve for hollow/perforated masonry: nominal dimensions and material

Resin sleeves are the effective way to create a fixing where there is a hollow void, such as for perforated bricks and blocks, or a more porous material for example blockwork. Resin is injected to fill the volume of the sleeve, and then forced through the fine perforations once the metal fixing rod is inserted. This distributes the resin material into the fixing cavity, forming a solid joint between the resin, the sleeve and the fixing.



Nylon Perforated Sleeve – 16 x 85

Nominal Diameter 16 mm

Nominal Length 85 mm

TCM MS PRO	Annex A6 of European Technical Assessment ETA-22/0353
Plastic sleeve	

Use:

The anchors are intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Basic Requirements 1 and 4 of Regulation 305/2011 (EU) shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences.

Anchors subject to:

- Static and quasi-static loads: sizes from M8 to M12.

Base materials:

- Solid masonry (Masonry Group b) or hollow or perforated masonry (Masonry Group c) according to Annex B9. The mortar strength class of the masonry has to be M 2,5 according to EN 998-2:2010 at minimum.

Temperature range:

The anchors may be used in the following temperature range:

Ta: -40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C),

Tb: -40°C to +80°C (max short term temperature + 80 °C and max long term temperature + 50 °C).

Use conditions (Environmental conditions):

Threaded rods:

- a) Carbon galvanized steel class 4.6, 5.8 or 6.8 according to EN ISO 898-1 for dry internal conditions.
- b) Stainless steel A4-70 and A4-80 according to EN ISO 3506 for dry internal conditions.

Nuts and washers:

Corresponding to anchor rod material above mentioned for the different environmental exposures.

Installation:

- Condition w/d: installation in wet substrate and use in structures subjected to dry, internal conditions.
- Perforation with drilling machine

Proposed design methods:

- EOTA Technical Report 054, Design method A

TCM MS PRO	Annex B1 of European Technical Assessment ETA-22/0353
Intended use - Specification	

Table B1 Installation data for solid masonry (brick n°1)*

Size		M8	M10	M12
Nominal drilling diameter	d_0 [mm]	10	12	14
Maximum diameter hole in the fixture	d_{fix} [mm]	9	12	14
Embedment depth	h_{ef} [mm]	85	85	85
Depth of the drilling hole	h_1 [mm]	$h_{ef} + 5$ mm		
Torque moment	T_{inst} [Nm]	2	2	2
Thickness to be fixed	$t_{fix,min}$ [mm]	> 0		
	$t_{fix,max}$ [mm]	< 1500		
Minimum spacing	S_{min} [mm]	255	255	255
Minimum edge distance	C_{min} [mm]	127,5	127,5	127,5

* Type of bricks are detailed in the Annex B9

Table B2: Installation data for hollow/perforated masonry (brick n° 2)*

Size		M8	M10	M12
Plastic sleeve		16x85		
Nominal drilling diameter	d_0 [mm]	16	16	16
Maximum diameter hole in the fixture	d_{fix} [mm]	9	12	14
Embedment depth	h_{ef} [mm]	85	85	85
Depth of the drilling hole	h_1 [mm]	$h_{ef} + 5$ mm		
Torque moment	T_{inst} [Nm]	2	2	2
Thickness to be fixed	$t_{fix,min}$ [mm]	> 0		
	$t_{fix,max}$ [mm]	< 1500		
Minimum spacing	$S_{min, }$ [mm]	560	560	560
	$S_{min,\perp}$ [mm]	200	200	200
Minimum edge distance	C_{min} [mm]	100	100	100

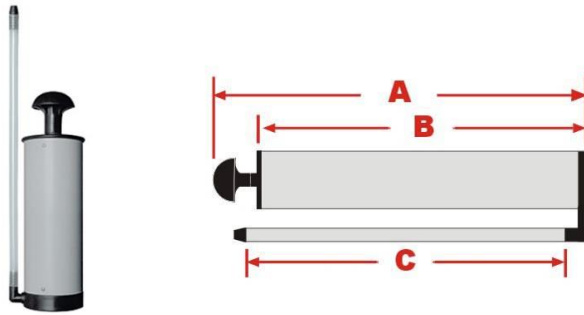
* Type of bricks are detailed in the Annex B9

TCM MS PRO

Intended use - data

Annex B2
of European
Technical Assessment
ETA-22/0353

Manual blower pump: nominal dimensions



190mm (240x190x300mm) -(A) : 240mm (overall) -(B) : 190mm (Body) -(C) : 300mm (Tube)	265mm (310x265x330mm) -(A) : 310mm (overall) -(B) : 265mm (Body) -(C) : 330mm (Tube)	370mm (420x370x460mm) -(A) : 420mm (overall) -(B) : 370mm (Body) -(C) : 460mm (Tube)
---	---	---

Steel Wire Brushes

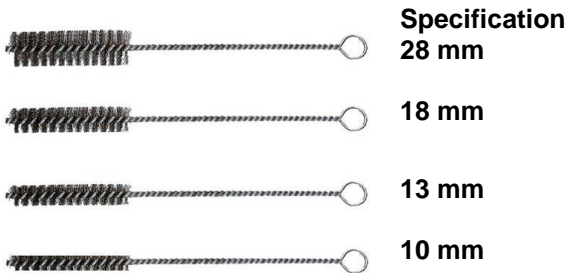

















Table B3: Brush diameter



Type of threaded rod			Use in solid masonry			Use in hollow/perforated masonry		
			M8	M10	M12	M8	M10	M12
d₀	Nominal drill hole	[mm]	10	12	14	16	16	16
d_b	Brush diameter	[mm]	10	13	15	18	18	18

TCM MS PRO	Annex B3 of European Technical Assessment ETA-22/0353
Cleaning tools	








Resin injection pump details		
Image	Size Cartridge / Code	Type
	165 / 300ml 300 ml 10:1	Manual
	345ml 345 ml 10:1	Manual
	380 / 410ml 380/410 ml 10:1	Manual
	165 / 300 / 345 / 380 / 410ml 300 ml 7.4v Tool 345 ml 7.4v Tool 380 ml 7.4v Tool	Battery
TCM MS PRO		Annex B4 of European Technical Assessment ETA-22/0353
Tools for injection		





Instructions for use	
Bore hole drilling	
	<p>Drill hole to the required embedment depth with a hammer drill set in rotation-hammer mode using an appropriately sized carbide drill bit.</p>
Bore hole cleaning Just before setting an anchor, the bore hole must be free of dust and debris.	
a) Manual air cleaning (MAC)	
	<p>X 4</p>
	<p>The manual pump may be used for blowing out bore holes</p> <p>Blow out at least 4 times from the back of the bore hole until return air stream is free of noticeable dust.</p>
	<p>X 4</p>
	<p>Brush 4 times with the specified brush size (brush $\varnothing \geq$ bore hole \varnothing, see Table B3) by inserting the steel brush to the back of the hole (if needed with an extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the bore hole. If not, the brush is too small and must be replaced with the proper brush diameter.</p>
	<p>X 4</p>
	<p>Blow out again with manual pump at least 4 times until return air stream is free from noticeable dust.</p>
b) Compressed air cleaning (CAC)	
	<p>X 2</p>
	<p>Blow 2 times from the back of the hole (if needed with a nozzle extension) over the hole length with oil-free compressed air (min. 6 bar at 6m³/h) until return air stream is free from noticeable dust.</p>
	<p>X 2</p>
	<p>Brush 2 times with the specified brush size (brush $\varnothing \geq$ bore hole \varnothing, see Table B3) by inserting the steel brush to the back of the hole (if needed with an extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the bore hole. If not, the brush is too small and must be replaced with the proper brush diameter.</p>
	<p>X 2</p>
	<p>Blow out again with compressed air at least 2 times until return air stream is free from noticeable dust.</p>
<p>TCM MS PRO</p>	<p>Annex B5</p>
<p>Procedure for solid masonry (1)</p>	<p>of European Technical Assessment ETA-22/0353</p>




Instructions for use	
	<p>Remove the threaded cap from the cartridge. Cut the bag below the clip if appropriate.</p>
	<p>Tightly attach the mixing nozzle. Do not modify the mixer in any way. Make sure the mixing element is inside the mixer. Use only the supplied mixer with the adhesive.</p>
	<p>Insert the cartridge into the dispenser. Press the release trigger to retract the plunger and insert the cartridge neatly into the cradle without any distortion.</p>
	<p>Discard the initial trigger pulls 10cm of adhesive. Resin will flow from the cartridge as soon as dispensing is initiated.</p>

Instructions for use	
	<p>Insert the nozzle to the bottom of the hole and inject the resin until the hole is filled 75%</p>
	<p>Insert the anchor, slowly with a slight twisting motion into the hole. Remove excess resin and leave the fixing until minimum curing (loading) times has elapsed</p>

<p>TCM MS PRO</p>	<p>Annex B6 of European Technical Assessment ETA-22/0353</p>
<p>Procedure for solid masonry (2)</p>	

Instructions for use		
Bore hole drilling		
		Drill hole to the required embedment depth with a hammer drill set in rotation-hammer mode using an appropriately sized carbide drill bit.
Bore hole cleaning Just before setting an anchor, the bore hole must be free of dust and debris.		
a) Manual air cleaning (MAC)		
	X 4	The manual pump may be used for blowing out bore holes Blow out at least 4 times from the back of the bore hole until return air stream is free of noticeable dust.
	X 4	Brush 4 times with the specified brush size (brush $\varnothing \geq$ bore hole \varnothing , see Table B3) by inserting the steel brush to the back of the hole (if needed with an extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the bore hole. If not, the brush is too small and must be replaced with the proper brush diameter.
	X 4	Blow out again with manual pump at least 4 times until return air stream is free from noticeable dust.
b) Compressed air cleaning (CAC)		
	X 2	Blow 2 times from the back of the hole (if needed with a nozzle extension) over the hole length with oil-free compressed air (min. 6 bar at 6m ³ /h) until return air stream is free from noticeable dust.
	X 2	Brush 2 times with the specified brush size (brush $\varnothing \geq$ bore hole \varnothing , see Table B3) by inserting the steel brush to the back of the hole (if needed with an extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the bore hole. If not, the brush is too small and must be replaced with the proper brush diameter.
	X 2	Blow out again with compressed air at least 2 times until return air stream is free from noticeable dust.
TCM MS PRO		Annex B7 of European Technical Assessment ETA-22/0353
Procedure for hollow/perforated masonry (1)		

Instructions for use	
	Remove the threaded cap from the cartridge. Cut the bag below the clip if appropriate.
	Tightly attach the mixing nozzle. Do not modify the mixer in any way. Make sure the mixing element is inside the mixer. Use only the supplied mixer with the adhesive.
	Insert the cartridge into the dispenser. Press the release trigger to retract the plunger and insert the cartridge neatly into the cradle without any distortion.
	Discard the initial trigger pulls 10cm of adhesive. Resin will flow from the cartridge as soon as dispensing is initiated.

Instructions for use	
	Introduce the sleeve of suitable dimension (see table) to the back of the hole so that the collar is level with the hole face. The cap may be opened to allow full nozzle insertion.
	Insert the nozzle to the end of the sleeve and inject the resin until the sleeve is 100% filled. Close the cap.
	Insert the anchor, slowly with a slight twisting motion into the sleeve. Remove excess resin and leave the fixing until minimum curing (loading) times has elapsed

TCM MS PRO	Annex B8 of European Technical Assessment ETA-22/0353
Procedure for hollow/perforated masonry (2)	


Table B5: Type of solid (Brick N° 1) and hollow/perforated masonry (Brick N° 2)

Solid Brick



Dimensions [mm]: 120 x 250 x 60
 f_b class $\geq 40 \text{ N/mm}^2$
density $\rho_m \geq 1666,7 \text{ kg/m}^3$

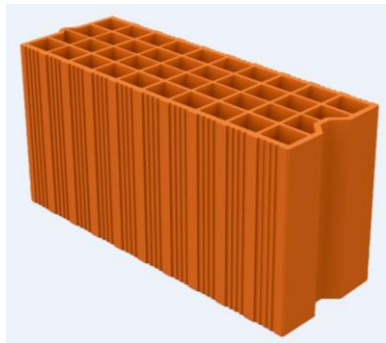Hollow/Perforated



Dimensions [mm]: 200 x 560 x 274
 f_b class $\geq 8,5 \text{ N/mm}^2$
density $\rho_m \geq 600 \text{ kg/m}^3$

TCM MS PRO

Type and dimensions of brick

Annex B9
of European
Technical Assessment
ETA-22/0353

Table C1: Essential Characteristics

ESSENTIAL CHARACTERISTICS		PERFORMANCE		
Installation parameters		M8	M10	M12
d [mm]		8	10	12
d ₀ [mm] category b (solid masonry)		10	12	14
d ₀ [mm] category c (hollow or perforated masonry)		16	16	16
Type of plastic sleeve for use in category c		16x85	16x85	16x85
d _{fix} [mm]		9	12	14
h _i [mm]		h _{ef} + 5 mm		
t _{fix} [mm]	Min	> 0		
	Max	≤ 1500 mm		
T _{inst} [Nm] category b (solid masonry)		2	2	2
T _{inst} [Nm] category c (hollow or perforated masonry)		2	2	2
S _{min} [mm] category b (solid masonry)		255	255	255
C _{min} [mm] category b (solid masonry)		127,5	127,5	127,5
S _{min} [mm] category c (hollow masonry) S _{min,}		560	560	560
S _{min} [mm] category c (hollow) S _{min,⊥}		200	200	200
C _{min} [mm] category c (hollow masonry)		100	100	100
* Resistance for tensile and shear load Temperature range -40°C/+40°C (T_{mlp} = 24°C)		M8	M10	M12
Brick n°1 (solid)	N _{Rk} [kN]	2,5		
	V _{Rk} [kN]	6,0		
Brick n°2 (hollow)	N _{Rk} [kN]	0,75		
	V _{Rk} [kN]	3,5		
* Resistance for tensile and shear load Temperature range -40°C to +80°C (T_{mlp} = 50°C)		M8	M10	M12
Brick n°1 (solid)	N _{Rk} [kN]	2,0		
	V _{Rk} [kN]	6,0		
Brick n°2 (hollow)	N _{Rk} [kN]	0,6		
	V _{Rk} [kN]	3,5		

* For design according to EOTA Technical Report 054: N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,pb} – steel failure is not decisive

* For design according to EOTA Technical Report 054: V_{Rk} = V_{Rk,b} – steel failure without lever arm is not decisive – V_{Rk,c} according to EOTA Technical Report 054

TCM MS PRO

Performance for static and quasi-static loads: Resistances

Annex C1
of European
Technical Assessment
ETA-22/0353

Table C2: Characteristic bending moments

Size			M8	M10	M12
Characteristic resistance with standard threaded rod grade 4.6	$M_{Rk,s}$	[Nm]	15	30	52
Partial safety factor	γ_{Ms}	[-]	1,67		
Characteristic resistance with standard threaded rod grade 5.8	$M_{Rk,s}$	[Nm]	19	37	66
Partial safety factor	γ_{Ms}	[-]	1,25		
Characteristic resistance with standard threaded rod grade 6.8	$M_{Rk,s}$	[Nm]	22	45	79
Partial safety factor	γ_{Ms}	[-]	1,25		
Characteristic resistance with standard threaded rod stainless steel A4-70 (class 70)	$M_{Rk,s}$	[Nm]	26	52	92
Partial safety factor	γ_{Ms}	[-]	1,56		
Characteristic resistance with standard threaded rod stainless steel A4-80 (class 80)	$M_{Rk,s}$	[Nm]	30	60	105
Partial safety factor	γ_{Ms}	[-]	1,33		

TCM MS PRO

Performance for static and quasi-static loads: Resistances

Annex C2
of European
Technical Assessment
ETA-22/0353

Table C3: Characteristic values for tension and shear load.

ESSENTIAL CHARACTERISTICS		PERFORMANCE		
* Resistance for tensile and shear load Temperature range -40°C/+40°C (T_{mlp} = 24°C) and -40°C to +80°C (T_{mlp} = 50°C)		M8	M10	M12
γ _{Mm} [-] Category w/d		2,50		
Brick n°1	S _{cr,N} [mm]	255	255	255
	C _{cr,N} [mm]	127,5	127,5	127,5
Brick n°2	S _{cr,N,} [mm]	560	560	560
	S _{cr,N ⊥} [mm]	200	200	200
	C _{cr,N} [mm]	100	100	100
β coefficient for in situ test (EOTA 053) Temperature range: -40°C/+40°C		M8	M10	M12
Brick N° 1 - Solid brick	β [-]	0,57		
Brick N° 2 - French Brick	β [-]	0,60		
β coefficient for in situ test (EOTA TR 053) Temperature range: -40°C/+80°C		M8	M10	M12
Brick N° 1 - Solid brick	β [-]	0,45		
Brick N° 2 - French Brick	β [-]	0,47		
Displacement under service load Tensile load Temperature range -40°C/+40°C (T_{mlp} = 24°C)				
Brick n°1 – Solid brick		M8	M10	M12
Admissible service load in tensile	F [kN]	0,71		
Displacement	δ _{N0} [mm]	0,02		
	δ _{N∞} [mm]	0,05		
Brick n°2 – Hollow/perforated brick		M8 With sleeve	M10 With sleeve	M12 With sleeve
Admissible service load in tensile	F [kN]	0,21		
Displacement	δ _{N0} [mm]	0,03		
	δ _{N∞} [mm]	0,05		
Displacement under service load Tensile load Temperature range -40°C to +80°C (T_{mlp} = 50°C)				
Brick n°1 – Solid brick		M8	M10	M12
Admissible service load in tensile	F [kN]	0,57		
Displacement	δ _{N0} [mm]	0,03		
	δ _{N∞} [mm]	0,06		
Brick n°2 – Hollow/perforated brick		M8 With sleeve	M10 With sleeve	M12 With sleeve
Admissible service load in tensile	F [kN]	0,17		
Displacement	δ _{N0} [mm]	0,03		
	δ _{N∞} [mm]	0,07		
TCM MS PRO				Annex C3 of European Technical Assessment ETA-22/0353
Performance for static and quasi-static loads: Resistances				

Table C3 cont.: Characteristic values for tension and shear load.

ESSENTIAL CHARACTERISTICS		PERFORMANCE		
Displacement under service load				
Shear load				
Temperature range -40°C/+40°C (T_{mlp} = 24°C) and -40°C to +80°C (T_{mlp} = 50°C)				
Brick n°1 – Solid brick		M8	M10	M12
Admissible service load in shear	F [kN]	1,71		
Displacement	δ _{v0} [mm]	0,45		
	δ _{v∞} [mm]	0,68		
Brick n°2 – Hollow/perforated brick		M8 With sleeve	M10 With sleeve	M12 With sleeve
Admissible service load in shear	F [kN]	1,00		
Displacement	δ _{v0} [mm]	1,15		
	δ _{v∞} [mm]	1,73		

Table C4: Reaction to fire.

ESSENTIAL CHARACTERISTICS	PERFORMANCE
Reaction to fire	In the final application the thickness of the mortar layer is about 1 to 2 mm and most of the mortar is material classified class A1 according to EC Decision 96/603/EC. Therefore, it may be assumed that the bonding material (synthetic mortar or a mixture of synthetic mortar and cementitious mortar) in connection with the metal anchor in the end use application do not make any contribution to fire growth or to the fully developed fire and they have no influence to the smoke hazard.

Table C5: Resistance to fire.

ESSENTIAL CHARACTERISTICS	PERFORMANCE
Resistance to fire	No performance assessed

TCM MS PRO

Performance for static and quasi-static loads: Resistances

Annex C4
of European
Technical Assessment
ETA-22/0353

Table C6: Terminology and symbols

TERMINOLOGY AND SYMBOLS	
d	Diameter of anchor bolt or thread diameter
d ₀	Drill hole diameter
d _{fix}	Diameter of clearance hole in the fixture
h _{ef}	Effective anchorage depth
h _i	Depth of the drilling hole
T _{inst}	Torque moment to installation
t _{fix}	Thickness to be fixed
S _{min}	Minimum allowable spacing
C _{min}	Minimum allowable edge distance
N _{Rk}	Characteristic tensile resistance for single anchor
V _{Rk}	Characteristic shear resistance for single anchor
γ _{Mm}	Partial safety factors
S _{cr,N}	Spacing for ensuring the transmission of the characteristic tensile resistance of a single anchor without spacing and edge effects
C _{cr,N}	Edge distance for ensuring the transmission of the characteristic tensile resistance of a single anchor without spacing and edge effects
β	Factor according to EOTA TR 053
F	Service load
δ ₀	Short term displacement under service load
δ _c	Long term displacement under service load
NPD	No performance declared

TCM MS PRO

Terminology and symbols

Annex C5
of European
Technical Assessment
ETA-22/0353