

Declaration of Performance

Nr: TT G/01/20221122/1488-CPR-1002/W



Revision No:	1
Revision carried out by:	Ben Beardon
Revision date:	22.11.2022

1. Unique identification code of product-type:	TT G Throughbolt	
2. Intended use/es:	Torque controlled expansion anchor of sizes M8, M10, M12, M16 and M20 for use in uncracked concrete	
3. Manufacturer:	Name:	Trutek Fasteners Polska Sp. z o.o.
	Address:	Al. Krakowska 38, Sękocin Janki 05-090 Raszyn, Polska
4. System/s of AVCP:	System:	1
5. European Assessment Document:	In accordance with regulation (EU) No 305/2011 on the basis of European Assessment Document EAD 330232-01-0601 „Metal fasteners for use in concrete”	
	European Technical Assessment	ETA-22/0225 of 18th of May 2022
	Issued by:	ITB - Building Research Institute in Warsaw
6. Notified body/ies:	Name:	Certification Department of ITB - Building Research Institute in Warsaw
	Notified body/ies No:	1488
	No of Certificate of Constancy of Performance:	1488-CPR-1002/W
7. Declared performance/es:	Mechanical resistance and stability (BWR 1)	
	Essential characteristic	Performance
	Characteristic resistance to tension load (static and quasi-static loading)	Annex C1
	Characteristic resistance to shear load (static and quasi-static loading)	Annex C3
	Displacements	Annexes C2 and C3
	Safety in case of fire (BWR 2)	
	Essential characteristic	Performance
	Reaction to fire	Anchor satisfy requirements for Class A1
	Resistance to fire	Annexes C4 and C5
	Durability	
	Essential characteristic	Performance
	Durability	Annex B1

The performance of the product identified above is in conformity with the set of declared performance/es. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Janki, 22nd of November 2022

Signed for and on behalf of the manufacturer by:



Ben Beardon
Operations Director

TRUTEK FASTENERS POLSKA Sp. z o.o.
Al. Krakowska 38, Janki
05-090 Raszyn
NIP: 5342256188 REGON: 015722173

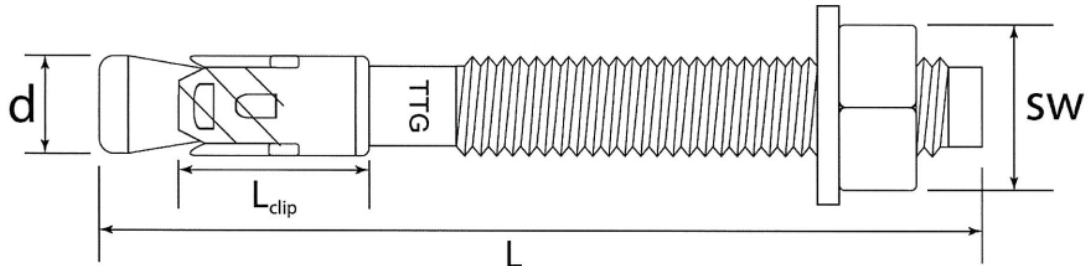


Table A1: TT G Throughbolt anchor dimensions

Type of anchor				d [mm]	L [mm]	L _{clip} [mm]	SW [mm]
Size	Marking	t _{fix,STD} ¹⁾ [mm]	t _{fix,RED} ²⁾ [mm]				
M8	TTG08	1 – 135	1 – 145	8	60 – 200	14.90	13
M10	TTG10	1 – 175	1 – 185	10	65 – 250	17.30	17
M12	TTG12	1 – 200	1 – 220	12	80 – 300	21.70	19
M16	TTG16	1 – 280	1 – 300	16	105 – 400	24.10	24
M20	TTG20	1 – 260	1 – 280	20	130 – 400	30.10	30

¹⁾ thickness of the fixed element for standard effective anchorage depth

²⁾ thickness of the fixed element for reduced effective anchorage depth

Marking:

Marking on the bolt: "TTG"

TT G Throughbolt

Product description
Dimensions and marking

Annex A1

of European
Technical Assessment
ETA-22/0225

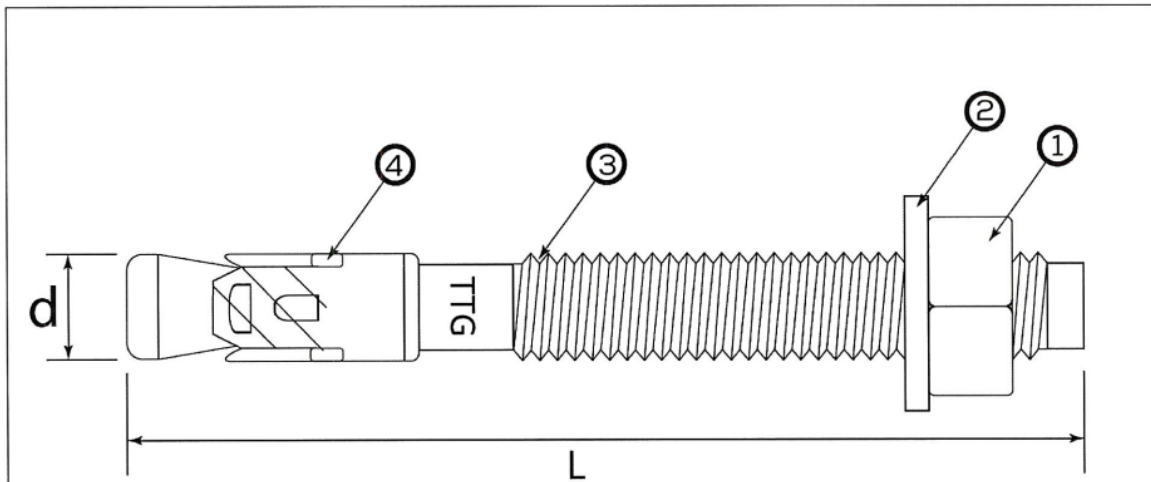


Table A2: Materials

Part	Designation	Material	Coating
1	Hexagon nut	carbon steel, class 5, EN ISO 898-2 DIN 934	hot dip galvanized $\geq 40 \mu\text{m}$ EN ISO 1461
2	Washer	DIN 125	
3	Bolt	C1008 $f_{uk} \geq 400 \text{ MPa}$, $f_{yk} \geq 320 \text{ MPa}$	
4	Expansion clip	stainless steel 304	-

TT G Throughbolt

Product description
Materials

Annex A2
of European
Technical Assessment
ETA-22/0225



Specification of intended use

Anchorage subject to:

- Static and quasi-static loads.
- Anchorages with requirements related to resistance to fire.

Base material:

- Reinforced or unreinforced normal weight concrete of strength classes C20/25 at minimum and C50/60 at maximum according to EN 206.
- Uncracked concrete.

Use conditions (environmental conditions):

- Structures subject to dry internal conditions.

Design:

- The anchorages under static loads and quasi-static loads are designed in accordance with EN 1992-4:2018 and EOTA Technical Report TR 055, under the responsibility of an engineer experienced in anchorages and concrete work.
- The position of the anchor is indicated on the design drawings.
- Verifiable calculation notes and drawings are taking account of the loads to be transmitted.

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Use of the anchor only as supplied by the manufacturer without exchanging any component of the anchor.
- Anchor installation in accordance with the manufacturer's specification and drawings and using the appropriate tools.
- Checks before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply.
- Check of concrete being well compacted, e.g. without significant voids.
- Effective anchorage depth, edge distance and spacing not less than the specified values without minus tolerances.
- Positioning of the drill holes without damaging the reinforcement.
- Hole drilling by hammer drill.
- Cleaning of the hole of drilling dust.
- Application of the torque moment using a calibrated torque wrench.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application.

TT G Throughbolt

**Intended use
Specifications**

Annex B1
of European
Technical Assessment
ETA-22/0225

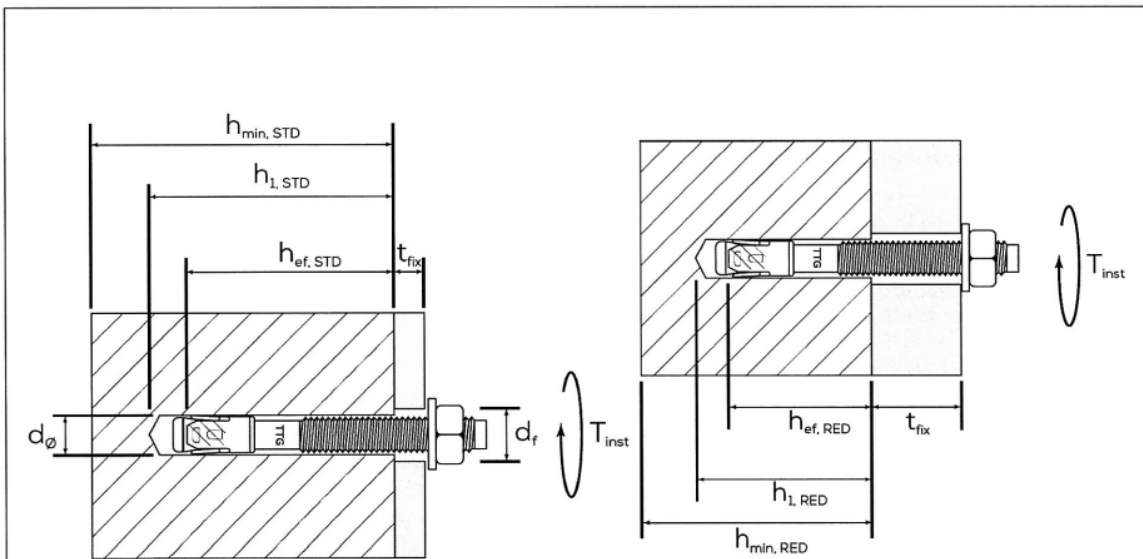


Table B1: Installation parameters

Anchor size		M8	M10	M12	M16	M20
Effective embedment depth (standard)	$h_{ef,STD} = [mm]$	45	50	70	85	100
Nominal embedment depth (standard)	$h_{nom,STD} = [mm]$	53	58	80	99	110
Depth of drill hole (standard)	$h_{1,STD} \geq [mm]$	60	65	90	110	120
Effective embedment depth (reduced)	$h_{ef,RED} = [mm]$	35	40	50	65	80
Nominal embedment depth (reduced)	$h_{nom,RED} = [mm]$	43	48	60	79	90
Depth of drill hole (reduced)	$h_{1,RED} \geq [mm]$	50	55	70	90	100
Nominal drill hole diameter	$d_{\phi} = d_{cut} = [mm]$	8	10	12	16	20
Diameter of clearance hole in the fixture	$d_f [mm]$	9	12	14	18	22
Installation torque	$T_{inst} = [Nm]$	25	34	60	120	200
Minimum thickness of member (standard embedment depth)	$h_{min,STD} = [mm]$	100	100	140	170	200
Minimum thickness of member (reduced embedment depth)	$h_{min,RED} = [mm]$	100	100	100	130	160
Minimum spacing	$s_{min} = [mm]$	35	40	50	65	80
Minimum edge distance	$c_{min} = [mm]$	35	40	50	65	80

TT G Throughbolt

Intended use
Installation parameters

Annex B2

of European
Technical Assessment
ETA-22/0225



Installation instruction	
TT G Throughbolt	Annex B3 of European Technical Assessment ETA-22/0225
Intended use Installation instruction	



Table C1: Characteristic values for tension loads, design method A						
Anchor size		M8	M10	M12	M16	M20
Steel failure						
Characteristic resistance	$N_{Rk,s}$ [kN]	14.6	23.2	33.7	62.8	98.0
Partial safety factor	$\gamma_{Ms}^{1)}$	1.5				
Pull-out failure						
Characteristic resistance in uncracked concrete C20/25 (standard depth)	$N_{Rk,p,STD}$ [kN]	9.5	16.0	28.0	28.0	48.0
Characteristic resistance in uncracked concrete C20/25 (reduced depth)	$N_{Rk,p,RED}$ [kN]	9.5	12.0	12.0	24.0	34.0
Installation safety factor	$\gamma_{inst}^{2)}$	1.0	1.0	1.0	1.0	1.2
Increasing factor for concrete C30/37		1.0	1.0	1.0	1.0	1.0
Increasing factor for concrete C40/50	ψ_c	1.0	1.0	1.0	1.0	1.0
Increasing factor for concrete C50/60		1.0	1.0	1.0	1.0	1.0
Concrete cone failure and splitting failure						
Effective anchorage depth (standard)	$h_{ef,STD} =$ [mm]	45	50	70	85	100
Effective anchorage depth (reduced)	$h_{ef,RED} =$ [mm]	35	40	50	65	80
Factor for uncracked concrete	$k_1^{2)}) = k_{ucr,N^{2)}$	11.0	11.0	11.0	11.0	11.0
Spacing (standard depth)	$s_{cr,N,STD}$ [mm]	135	150	210	255	300
Edge distance (standard depth)	$c_{cr,N,STD}$ [mm]	67.5	75	105	127.5	150
Spacing (reduced depth)	$s_{cr,N,RED}$ [mm]	105	120	150	195	240
Edge distance (reduced depth)	$c_{cr,N,RED}$ [mm]	52.5	60	75	97.5	120
Characteristic resistance for splitting (standard depth)	$N_{Rk,sp,STD}^{0)}$ [kN]	9.5	16.0	28.0	28.0	48.0
Characteristic resistance for splitting (reduced depth)	$N_{Rk,sp,RED}^{0)}$ [kN]	9.5	12.0	12.0	24.0	34.0
Spacing (standard depth)	$s_{cr,sp,STD}$ [mm]	135	150	210	255	300
Edge distance (standard depth)	$c_{cr,sp,STD}$ [mm]	67.5	75	105	127.5	150
Spacing (reduced depth)	$s_{cr,sp,RED}$ [mm]	105	120	150	195	240
Edge distance (reduced depth)	$c_{cr,sp,RED}$ [mm]	52.5	60	75	97.5	120
Installation safety factor	$\gamma_{inst}^{2)}$	1.0	1.0	1.0	1.0	1.2
¹⁾ in the absence of other national regulations						
²⁾ parameter for design according to EN 1992-4:2018						
TT G Throughbolt					Annex C1 of European Technical Assessment ETA-22/0225	
Performances Characteristic values for tension loads, design method A						



Table C2: Displacements under tension loads

Anchor size		M8	M10	M12	M16	M20
Tension load	N [kN]	4.5	7.1	6.0	11.9	17.3
Displacement	δ_{NO} [mm]	1.3	1.3	1.3	1.3	1.4
	δ_{Nz} [mm]	1.6	1.6	1.6	1.6	1.6

TT G Throughbolt

Performances
Displacements under tension loads

Annex C2
of European
Technical Assessment
ETA-22/0225



Table C3: Characteristic values for shear loads, design method A

Anchor size		M8	M10	M12	M16	M20
Steel failure without lever arm						
Characteristic resistance	$V^{0}_{RK,s^{3)}$ [kN]	7.3	11.6	16.9	31.4	49.0
Ductility factor	$k_{\gamma}^{3)}$	1.0	1.0	1.0	1.0	1.0
Partial safety factor	$\gamma_{Ms}^{2)}$	1.25	1.25	1.25	1.25	1.25
Steel failure with lever arm						
Characteristic bending resistance	$M^{0}_{RK,s}$ [Nm]	15.0	29.9	52.4	133.2	259.6
Partial safety factor	$\gamma_{Ms}^{2)}$	1.25	1.25	1.25	1.25	1.25
Concrete pry-out failure¹⁾						
Concrete pry-out failure factor	$k_{8}^{3)}$	1.0	1.0	2.0	2.0	2.0
Partial safety factor	$\gamma_{Mc}^{2)}$	1.5	1.5	1.5	1.5	1.8
Concrete edge failure						
Effective length of anchor under shear loading (standard depth)	$l_{f,STD}$ [mm]	45	50	70	85	100
Effective length of anchor under shear loading (reduced depth)	$l_{f,RED}$ [mm]	35	40	50	65	80
Effective diameter of anchor	d_{nom} [mm]	8	10	12	16	20
Partial safety factor	$\gamma_{Mc}^{2)}$	1.5	1.5	1.5	1.5	1.8
¹⁾ the pry-out failure is not decisive ²⁾ in the absence of other national regulations ³⁾ parameter for design according to EN 1992-4:2018						

Table C4: Displacements under shear loads

Anchor size		M8	M10	M12	M16	M20
Shear load	V [kN]	4.1	6.8	11.5	13.8	29.4
Displacement	δ_{vo} [mm]	0.8	1.1	1.1	1.1	2.5
	δ_{vs} [mm]	1.2	1.7	1.7	1.7	3.8

TT G Throughbolt

Performances

Characteristic values for shear loads, design method A, displacements

Annex C3
of European
Technical Assessment
ETA-22/0225



Anchor size				M8	M10	M12	M16	M20
Steel failure								
Characteristic resistance	R30	N _{Rk,s,fi}	[kN]	0.4	0.9	1.7	3.1	4.9
	R60	N _{Rk,s,fi}	[kN]	0.3	0.8	1.3	2.4	3.7
	R90	N _{Rk,s,fi}	[kN]	0.3	0.6	1.1	2.0	3.2
	R120	N _{Rk,s,fi}	[kN]	0.2	0.5	0.8	1.6	2.5
Pull-out failure								
Characteristic resistance	R30	N _{Rk,p,fi}	[kN]	2.4	3.1	3.1	6.2	8.8
	R60	N _{Rk,p,fi}	[kN]	2.4	3.1	3.1	6.2	8.8
	R90	N _{Rk,p,fi}	[kN]	2.4	3.1	3.1	6.2	8.8
	R120	N _{Rk,p,fi}	[kN]	1.9	2.5	2.5	5.0	7.0
Concrete cone failure								
Characteristic resistance	R30	N _{Rk,c,fi}	[kN]	1.8	2.6	4.5	8.6	14.5
	R60	N _{Rk,c,fi}	[kN]	1.8	2.6	4.5	8.6	14.5
	R90	N _{Rk,c,fi}	[kN]	1.8	2.6	4.5	8.6	14.5
	R120	N _{Rk,c,fi}	[kN]	1.5	2.0	3.6	6.9	11.6
Edge distance								
	R30	C _{cr,N,fi}	[mm]	2 x h _{ef}				
	R60	C _{cr,N,fi}	[mm]					
	R90	C _{cr,N,fi}	[mm]					
	R120	C _{cr,N,fi}	[mm]					
In case of fire attack from more than one side minimum edge distance shall be ≥ 300 mm								
Spacing								
	R30	S _{cr,N,fi}	[mm]	4 x h _{ef}				
	R60	S _{cr,N,fi}	[mm]					
	R90	S _{cr,N,fi}	[mm]					
	R120	S _{cr,N,fi}	[mm]					
TT G Throughbolt				Annex C4 of European Technical Assessment ETA-22/0225				
Performances Characteristic resistance for tension loads under fire exposure								



Table C5: Characteristic resistance for shear loads under fire exposure

Anchor size				M8	M10	M12	M16	M20
Steel failure without lever arm								
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	0.4	0.9	1.7	3.1	4.9
	R60	$V_{Rk,s,fi}$	[kN]	0.3	0.8	1.3	2.4	3.7
	R90	$V_{Rk,s,fi}$	[kN]	0.3	0.6	1.1	2.0	3.2
	R120	$V_{Rk,s,fi}$	[kN]	0.2	0.5	0.8	1.6	2.5
Steel failure with lever arm								
Characteristic bending resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	0.6	1.7	3.9	9.3	18.3
	R60	$M^0_{Rk,s,fi}$	[Nm]	0.5	1.4	2.9	7.0	13.7
	R90	$M^0_{Rk,s,fi}$	[Nm]	0.4	1.1	2.5	6.0	11.9
	R120	$M^0_{Rk,s,fi}$	[Nm]	0.3	0.9	1.9	4.6	9.1

TT G Throughbolt

Performances

Characteristic resistance for shear loads under fire exposure

Annex C5

of European
Technical Assessment
ETA-22/0225